


# Choke & Kill Armor

## Specification Sheet





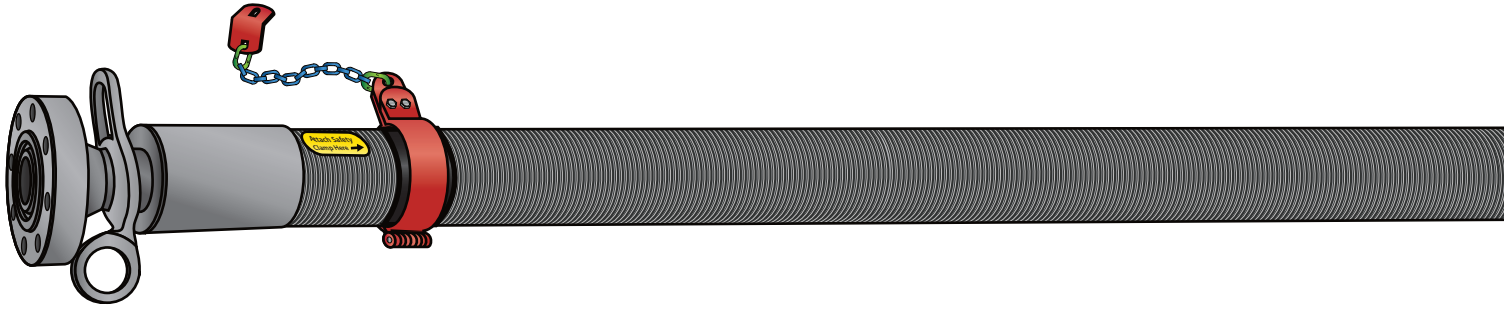



**Tube** Nitrile

**Reinforcement** 4,6, or 8 steel wire spiral layers

**Cover** Stainless steel armor 0.144" wall, protects against impacts, wear, handling, etc.

**Fire Protection** 1300° F continuous rating thermal blanket, non-flammable, non-conductive

Choke & Kill Armor								
		ID	OD	Max WP	Test Pressure	Bend Radius	Weight	
		inch	inch	psi	psi	inch	lbs./ft.	coupling
Designed for general choke and kill service. Used as a flexible connection (instead of pipe) to the choke manifold.	CK-32 Armor	2	3.25	5,000	7,500	13	11.1	55
	CK-48 Armor	3	6.5			26	20.8	117
	CK-56 Armor	3-1/2	7			28	23.1	151
	CK-64 Armor	4	8			32	26.3	168
	CK-3210K Armor	2	3.25	10,000	15,000	13	14.9	58
	CK-4810K Armor	3	6.5			26	26.0	126
	CK-5610K Armor	3-1/2	7			28	29.0	171
	CK-6410K Armor	4	8			32	32.8	188

**Certifications** NACE MRO175/550 15156

**Max Length** 150 feet

**Min Burst Requirement** 12,500 psi on 5K, 22,500 psi on 10K

Inspected

Proof tested to test pressure

TEST DOCUMENTATION



-20° F to 180° F